

(43) International Publication Date  
29 April 2004 (29.04.2004)

PCT

(10) International Publication Number  
WO 2004/035479 A1(51) International Patent Classification<sup>7</sup>: C02F 1/02, 1/04, 1/20, 1/66, 1/42, 1/62, 1/64

SCHOEN, Richard, M. [US/US]; N67W29767 Hartling Road, Hartland, WI 53029 (US).

(21) International Application Number:  
PCT/US2003/033066

(74) Agents: WOZNÝ, Thomas, M. et al.; Andrus, Sceales, Starke &amp; Sawall, LLP, 100 East Wisconsin Avenue, Suite 1100, Milwaukee, WI 53202 (US).

(22) International Filing Date: 17 October 2003 (17.10.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/419,549 18 October 2002 (18.10.2002) US  
60/419,552 18 October 2002 (18.10.2002) US

(71) Applicant (for all designated States except US): AQUATECH INTERNATIONAL CORPORATION [US/US]; One-Four Coins Drive, Canonsburg, PA 15317 (US).

(72) Inventors; and  
(75) Inventors/Applicants (for US only): MINNICH, Keith, R. [US/US]; W291 N3821 Round Hill Circle, Pewaukee, WI 53072 (US). KARLAPUDI, Ramkumar [IN/US]; 1981 Foxcroft Lane, Waukesha, WI 53189 (US).


(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:  
— with international search report

[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR HIGH EFFICIENCY EVAPORATION OPERATION

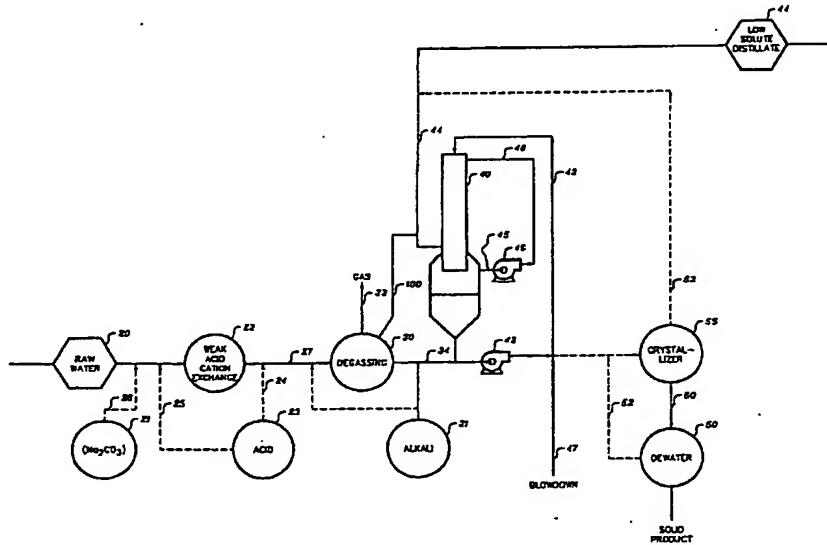

WO 2004/035479 A1

(57) Abstract: A process for treatment of an aqueous stream to produce a low solute containing distillate stream and a high solute/solids containing blowdown stream utilizing a method to increase the efficiency of an evaporator while providing an essentially scale free environment for the heat transfer surface. Multi-valent ions and non-hydroxide alkalinity are removed from aqueous feed streams to very low levels and then the pH is increased preferably to about 9 or higher to increase the ionization of low ionizable constituents in the aqueous solution. In this manner, species such as silica and boron become highly ionized, and their solubility in the concentrated solution that is present in the evaporation equipment is significantly increased. The result of this is high allowable concentration factors and a corresponding increase in the recovery of high quality reusable water with essentially no scaling.



- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.